


**VELTEKO**

Vertical packaging  
machine

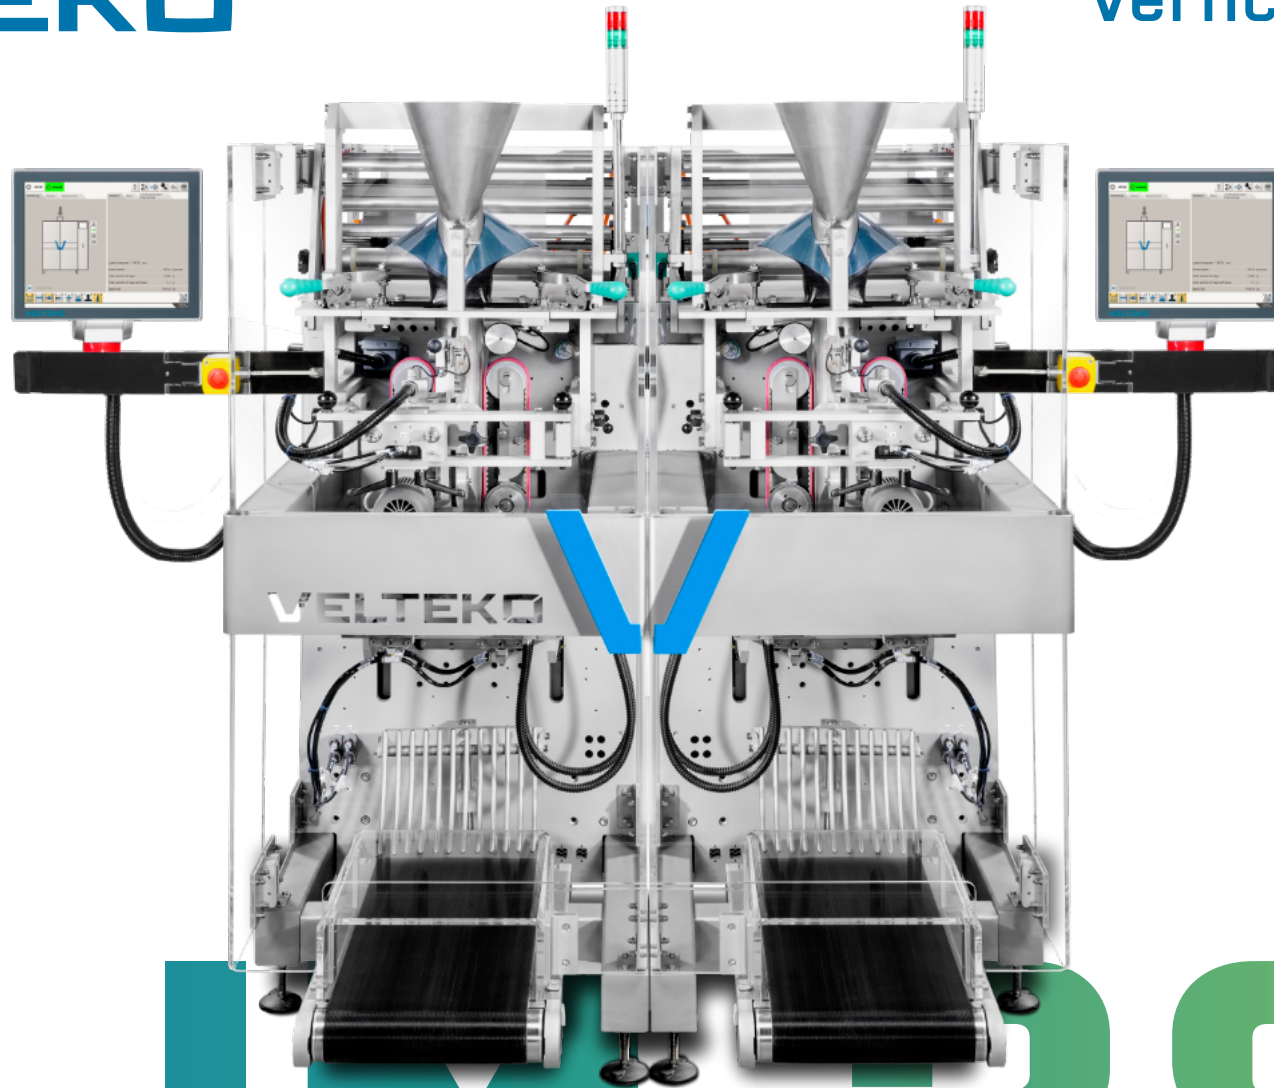


**SLIM-280**

# Compact, high-speed vertical bagger

**200**  
bags / min  
max. speed

**820mm**  
machine width

**Easy to operate  
and maintain**

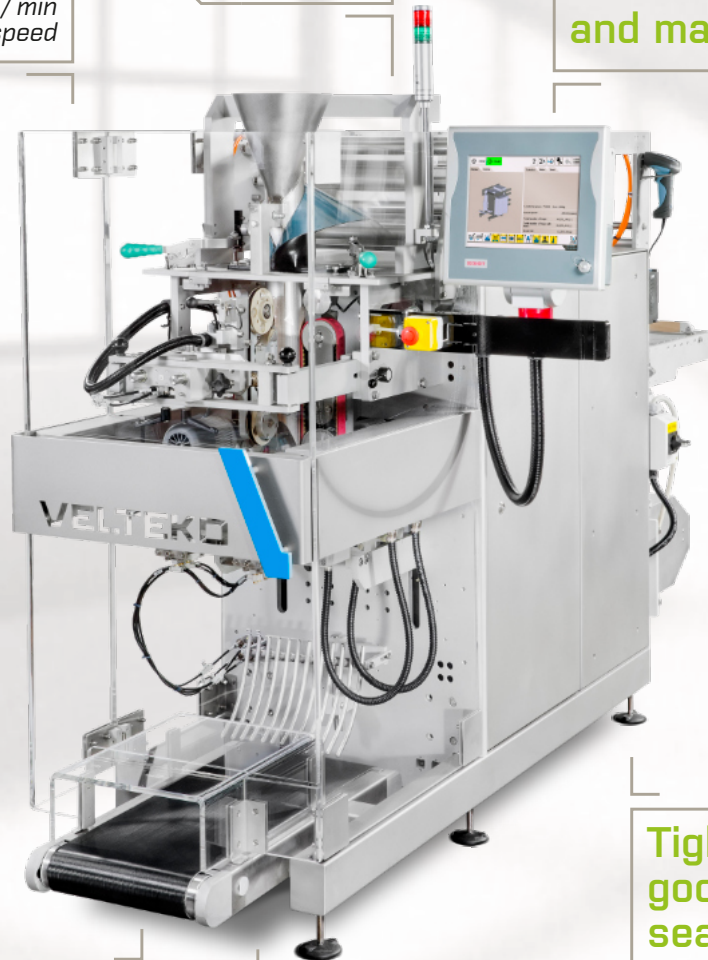

**Easy to clean**  
stainless-steel  
construction

**280mm**  
max. cross  
seal width

**Tight and  
good-looking  
seals**

## MACHINE FEATURES

- Automatic film centering
- Vacuum pulling belts
- Registration mark sensor
- Mechanic splicing table
- Robust construction
- Self-diagnostics and troubleshooting

## HUMAN-MACHINE INTERFACE

- 15" full color touch screen
- Industrial PC
- Intuitive machine setup and on-screen guide
- User presets for machine setup






## DATASERVICE

- Online service support
- Online data management
- OPC dataservice available

Learn more...




## PILLOW BAG + modifications

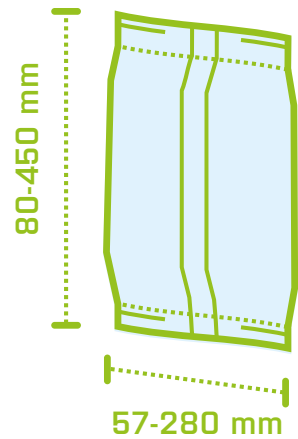

## Tight and good-looking seals

Sophisticated servo-driven motion control of the simultaneous cross sealing jaws allows maximum sealing time at high speed.

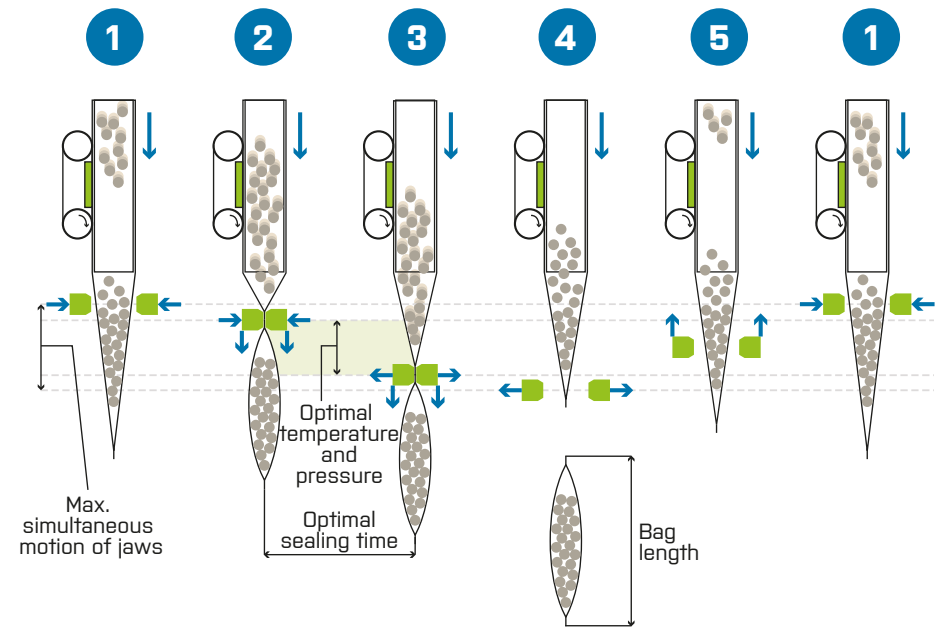

The special power sealing mechanism drives the cross sealing jaws, which exert the necessary force to achieve perfect seals with a wide range of films.

# VELTEKO Philosophy


Provide customers around the world with a wide range of versatile and specialized vertical packaging solutions tailored to their individual needs.

## Advanced Engineering, Design and Construction



Extreme reliability and an extra long service life are a direct result of VELTEKO's cutting edge engineering and design, combined with precise manufacturing in the Czech Republic using the highest quality materials and branded components.

## We supply complete packaging systems

- ▣ *Upstream and downstream systems*
- ▣ *Custom project engineering*
- ▣ *Technical and engineering support throughout the packaging system's life cycle*

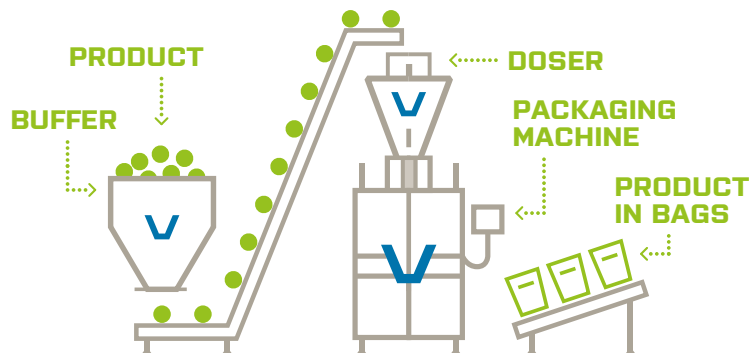

# Technical parameters

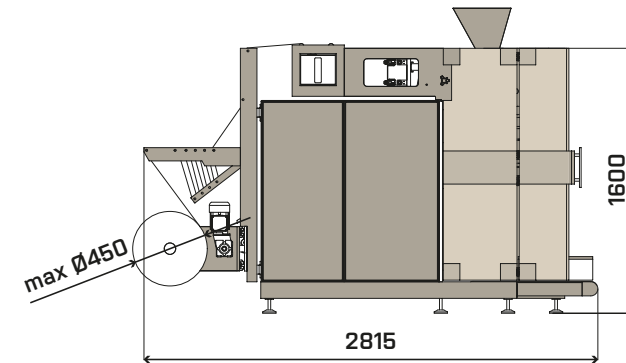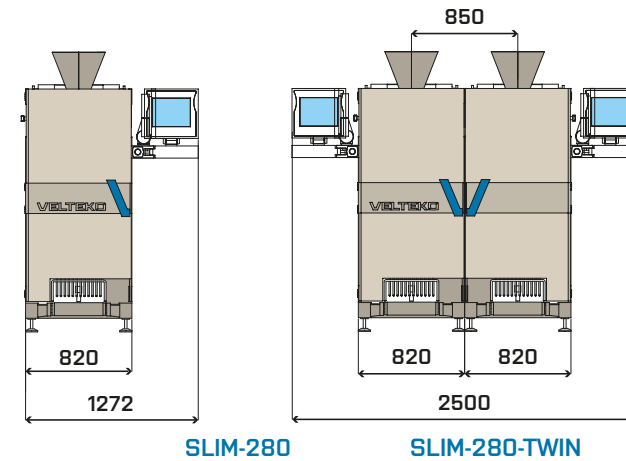


	SLIM-280	SLIM-280-TWIN
Operating mode	continuous	continuous
Speed	200 pillow bags/min	400 pillow bags/min
Max. dimension of cross seal	280 mm	280 mm
Protection	IP54	IP54
Construction materials	Stainless steel	Stainless steel

# Contacts

VELTEKO CZ s.r.o.  
K Borovickam 1716  
258 01 Vlasim  
Czech Republic  
Tel. +420 317 846 473  
velteko@velteko.cz

VELTEKO POLSKA Sp. z o. o.  
Ul. Sw. Michala 43  
61-119 Poznań  
Polska  
Tel. + 48 61 650 34 07  
velteko@velteko.pl

## GLOBAL SALES NETWORK

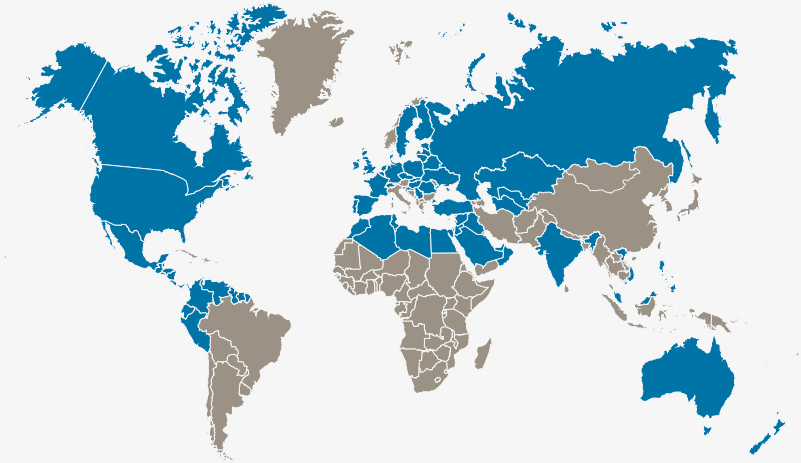


REGIONS COVERED BY VELTEKO DISTRIBUTORS

Your Velteko Distributor

 **DUBA ELEKTRONİK**  
İLETİŞİM SİSTEMLERİ SAN. ve TİC. LTD. ŞTİ.

İnönü Mah. Elmadağ Cad. Harbiye Çayırı Sok.  
No.3 / 11 34373 Şişli İstanbul- Türkiye  
Telefon: +90 212 343 48 12 • Faks: +90 212 250 96 39  
duba@duba.com.tr • www.duba.com.tr



[www.velteko.com](http://www.velteko.com)

The contents of this catalog are not an offer for a contract, a promise to conclude a contract nor any legal proceedings by VELTEKO s.r.o. regardless of its content or denominations. VELTEKO s.r.o. reserves the right to change the specifications of machines that are illustrated and described in this catalog. Photos of machines are for informational purposes only and may contain optional accessories. Please contact your local distributor to receive an offer that is tailored to your requirements.

## More from our portfolio

### VERSATILE-360

- 100 different bag types with one machine
- 200 bags/min maximum speed
- 5 - 45 min. changeover to different bag type
- More than 16 variants of DOYPACK bags



### DOSING DEVICES

- Complex range of dosing devices and weighers for a wide range of food and non-food products
- Volumetric friction, volumetric flap and auger filler dosers
- Vibratory and belt dosing weighers



**VELTEKO – The vertical packaging machine experts**